

Product Details



CL001 Flexible Linear Light




Philips chips, CRI 90
Lens 15° / 25° / 38° / 25x50°



Seamlessly interconnected joints.



Horizontally, it can be bent to form nearly any desired curve.



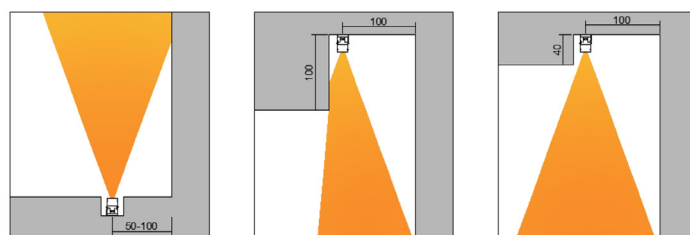


Due to small cross section design, our linear ceiling surface-mounted luminaires offer significant advantages, ensuring seamless integration without obstructing HVAC systems and other ceiling utilities.

Spec guide





- Tiny size for narrow spaces
- Flexible and bendable design
- Effective wall washing
- Philips LED chips, CRI 90
- Indoor and outdoor applications, IP65 optional

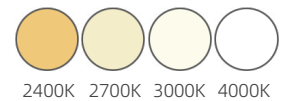

Item No.	Power	Length	Beam Angle	Lumen	Input Current
CL001	8W 12W 24W	L=312mm L=508mm L=1012mm	15° 25° 38° 25x50°	83 lm/W	Constant Current 300mA

Light distribution curve

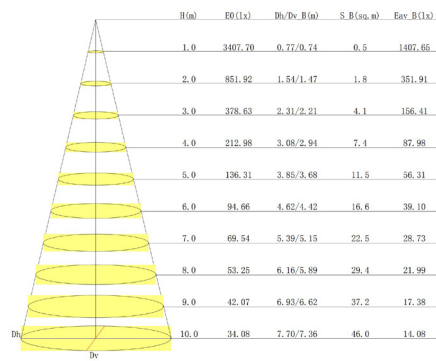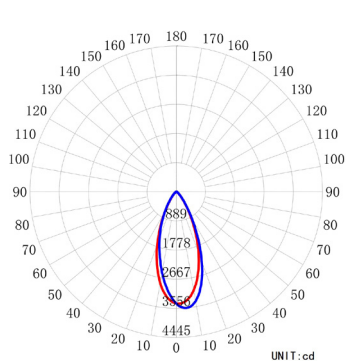

Colour temperature - CRI

- 2400K - CRI > 90
- 2700K - CRI > 90
- 3000K - CRI > 90
- 4000K - CRI > 90

IP protection rating

- IP20
- IP65

Dimmable

- Triac
- PWM
- 0~10V
- DALI

Accessories