

Product Details



CL005 Flexible Linear Light



Philips chips, CRI 90
Lens Oval / 10° / 25° / 40°
Anti-glare shield



Sturdy mounting bracket, easy to adjust installation angles.


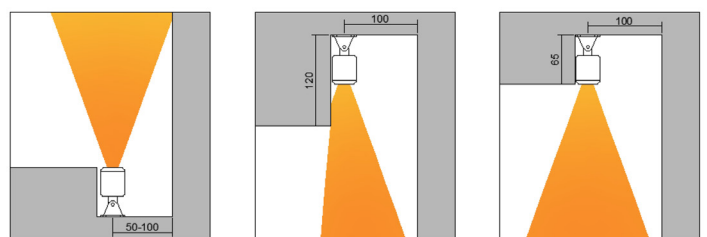
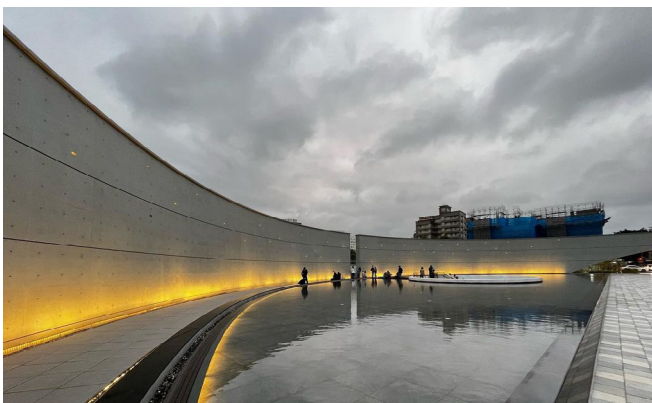


Due to small cross section design, our linear ceiling surface-mounted luminaires offer significant advantages, ensuring seamless integration without obstructing HVAC systems and other ceiling utilities.

Spec guide





- Deep anti-glare design
- Flexible & bendable design
- Effective wall washing
- Philips LED chips, CRI 90
- IP67, suitable for indoor and outdoor applications

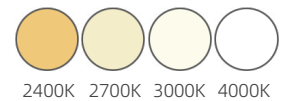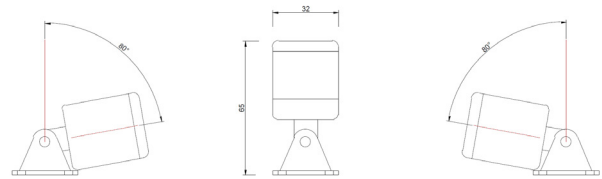

Item No.	Power	Length	Beam Angle/Optics	Lumen	Input Voltage
CL005	30W/M	L=100mm L=200mm L=300mm L=1000mm	10° 25° 40° Oval	88 lm/W	DC24V

Light distribution curve

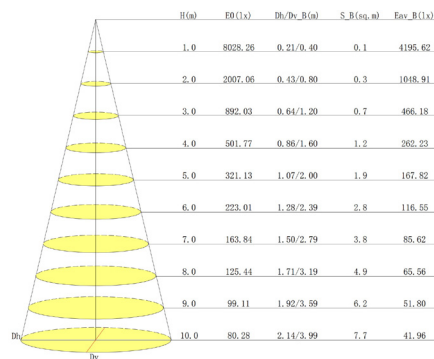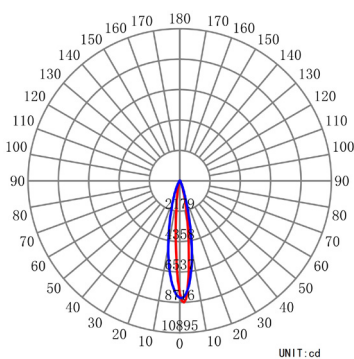

Colour temperature - CRI IP protection rating Dimmable Accessories

2400K - CRI > 90
2700K - CRI > 90
3000K - CRI > 90
4000K - CRI > 90

IP67

Triac
PWM
0~10V
DALI