


# Product Details

## CL009 Flexible Linear Light




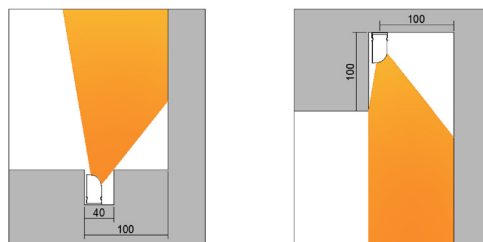


This flexible wallwasher adjusts at multiple points, achieving effects that typically require two or more fixtures, and ensuring seamless integration without obstructing HVAC systems and other ceiling utilities.

# Spec guide




- Tiny size for narrow spaces
- Flexible and bendable design
- Effective wall washing
- Philips LED chips, CRI 90

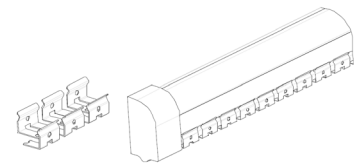

Item No.	Power	Length	Beam Angle	Lumen	Input Current
CL009	20W/M	L=1000mm L=2100mm	25° 45° 25x50°	78 lm/W	DC24V

## Light distribution curve

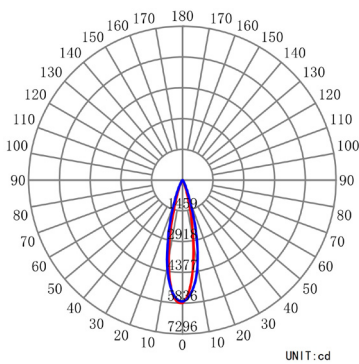

H(m)	FD(lx)	Bh/Dr.B(m)	S.B(sq.m)	Eav.B(lx)
1.0	5836.88	0.40/0.49	0.2	2552.27
2.0	1459.22	0.79/0.98	0.6	638.07
3.0	618.54	1.19/1.48	1.1	283.59
4.0	364.80	1.59/1.97	2.5	159.52
5.0	233.48	1.98/2.46	3.9	102.09
6.0	162.14	2.38/2.95	5.6	70.90
7.0	119.12	2.78/3.44	7.6	52.09
8.0	91.20	3.17/3.94	9.9	39.88
9.0	72.06	3.57/4.43	12.6	31.51
10.0	58.37	3.97/4.92	15.5	25.52

## Colour temperature - CRI

- 2700K - CRI > 90
- 3000K - CRI > 90
- 4000K - CRI > 90

## IP protection rating

IP67

## Dimmable

- Triac
- PWM
- 0~10V
- DALI

## Accessories