



Spec guide




- OSRAM LED chip, CRI 90
- Deep anti-glare, cutoff angle 40° , with honeycomb accessory
- The lamp housing uses aluminum CNC processing + aluminum radiator structure.
- Full snoot, half snoot, spike are optional accessories
- Many beam angles optional, uniform light distribution, no spill light.
- AkzoNobel coating, 1000H salt spray test, suitable for projects close to sea.
- Suitable for facade, landscape and other places.

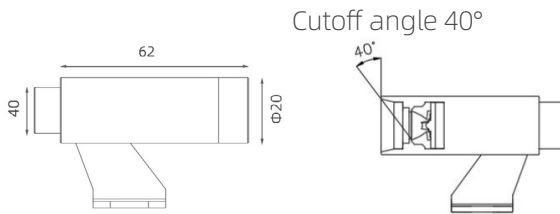

Item No.	Power	Beam Angle	lumen(3000K)	Input Voltage
VISTA-1	2.5W	24.5° 35.7° 42.6°	97 lm	DC24V DC48V

Light distribution curve

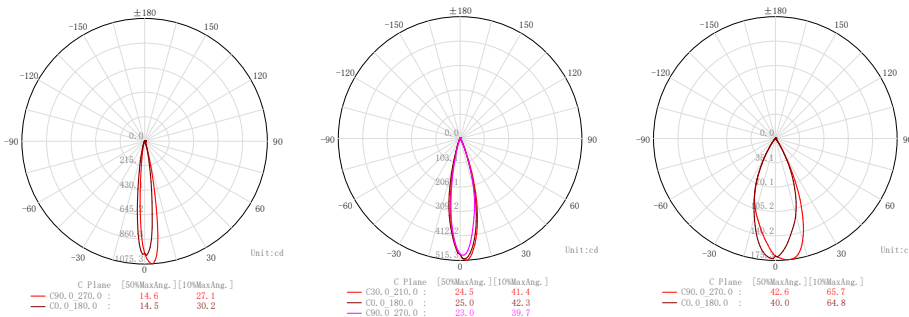

CCT - CRI

2700K - CRI > 90
 3000K - CRI > 90
 3500K - CRI > 90
 4000K - CRI > 90
 RGB DMX512
 RGBW DMX512

IP - IK rating

IP66
 IK06

Dimmable

Triac
 PWM
 0~10V
 DALI

Accessories



Snoot-A

Spike