

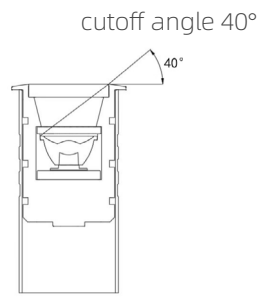


Spec guide

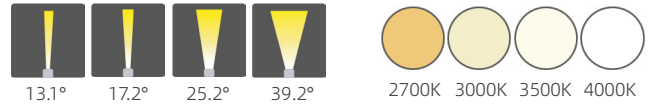


- Deep anti-glare, cutoff angle 40°, with honeycomb accessory
- The light source is Bridgelux chip, CRI > 90.
- Stainless steel 316L cover & cord grip with passivation process, suitable for projects close to sea.
- The aluminum lamp housing with CNC process and AkzoNobel coating of double-layer spraying, suitable for projects close to sea.
- Multiple beam angle options, and the illumination is uniform.
- Suitable for facade, landscape and other places.

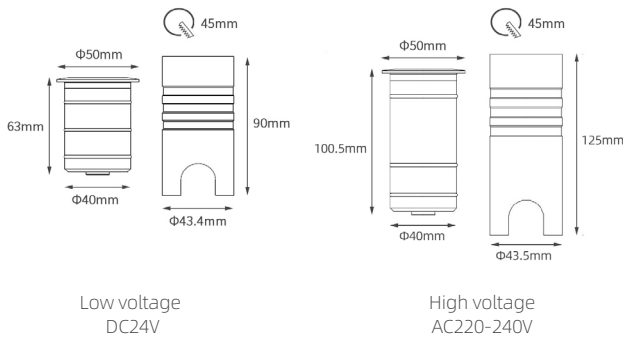

| Item No. | Power | Beam Angle | lumen(3000K) | Input Voltage |
|----------|------------|------------|--------------|---------------------|
| VIVA-D2 | 3.5W 5W | 13.1° | 172 lm | DC24V AC220-240V |
| | | 17.2° | 172 lm | |
| | | 25.2° | 154 lm | |
| | | 39.2° | 108 lm | |

Light distribution curve

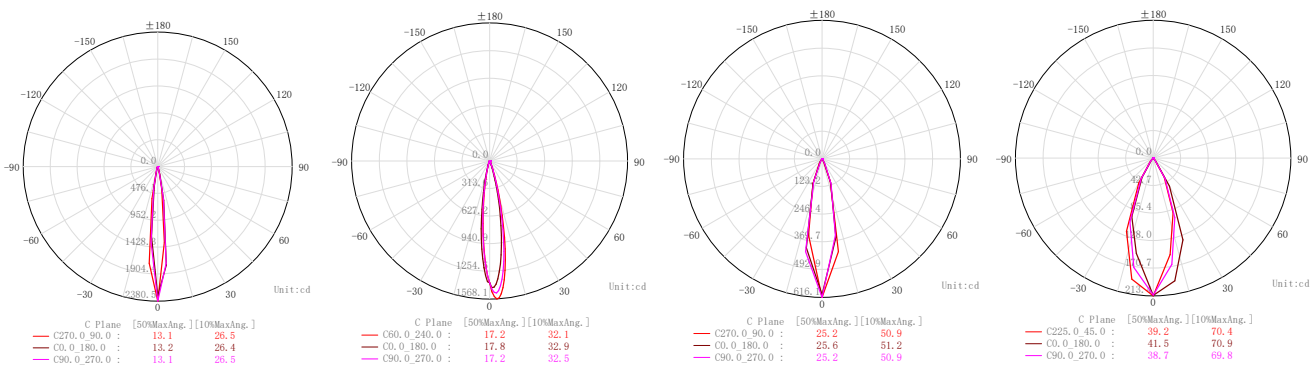

| Colour temperature - CRI | IP - IK protection rating | Dimmable | Accessories |
|--------------------------|---------------------------|-------------------------------|---|
| 2700K - CRI > 90 | IP67 IK07 | Triac PWM 0~10V DALI |  |
| 3000K - CRI > 90 | | | |
| 3500K - CRI > 90 | | | |
| 4000K - CRI > 90 | | | |

Remark:
2*0.5 rubber wire, 1 meter length, includes 4 cm length open wire with wire ferrule

Aluminum Recessed Sleeve