

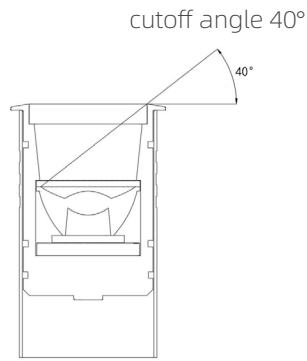


Spec guide

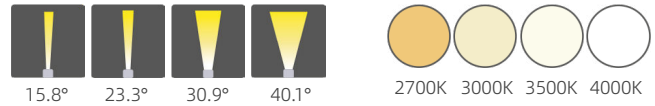


- Deep anti-glare, cutoff angle 40°, with honeycomb accessory
- The light source is Bridgelux chip, CRI > 90.
- Stainless steel 316L cover & cord grip with passivation process, suitable for projects close to sea.
- The aluminum lamp housing with CNC process and AkzoNobel coating of double-layer spraying, suitable for projects close to sea.
- Multiple beam angle options, and the illumination is uniform.
- Suitable for facade, landscape and other places.

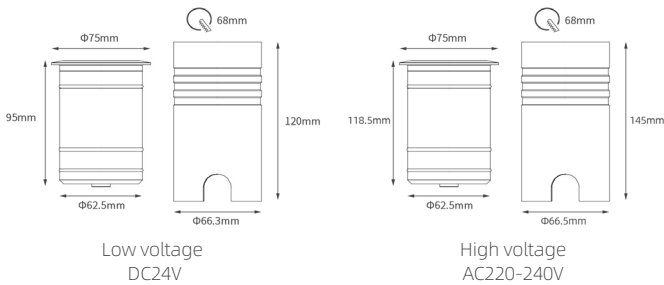

Item No.	Power	Beam Angle	lumen(3000K)	Input Voltage
VIVA-D3	7W	15.8° 23.3° 30.9° 40.1°	436 lm 527 lm 468 lm 374 lm	DC24V AC220-240V

Light distribution curve

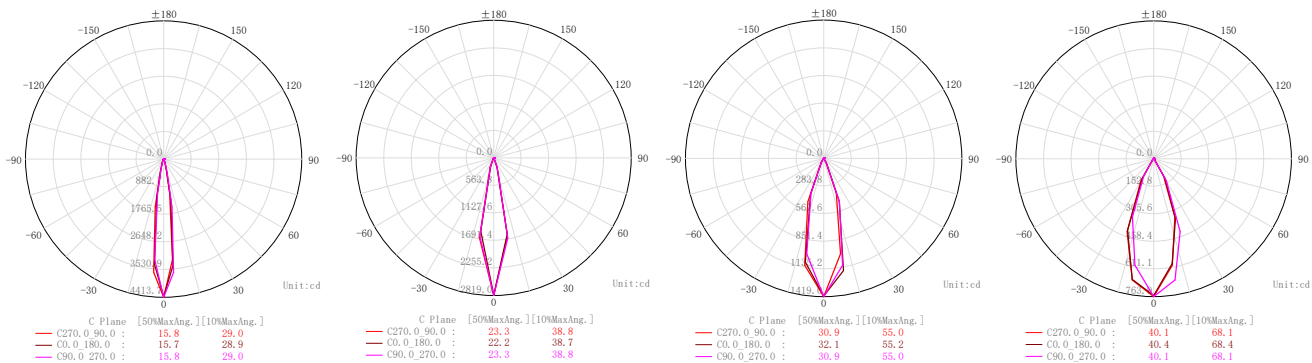

Colour temperature - CRI	IP - IK protection rating	Dimmable	Accessories
2700K - CRI > 90 3000K - CRI > 90 3500K - CRI > 90 4000K - CRI > 90	IP67 IK10	Triac PWM 0~10V DALI	 Aluminum Recessed Sleeve

Remark:

2*0.5 rubber wire, 1 meter length, includes 4 cm length open wire with wire ferrule