



Spec guide

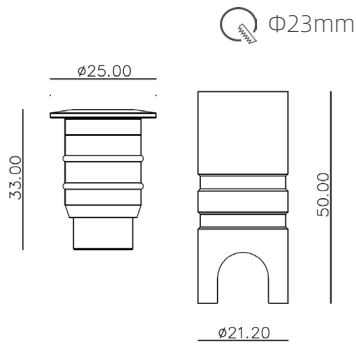

- The light source is Bridgelux/LUMILEDS chip.
- Stainless steel 316L cover & cord grip with passivation process, suitable for projects close to sea.
- The aluminum lamp housing with CNC process and AkzoNobel coating of double-layer spraying, suitable for projects close to sea.
- The illumination is uniform.
- Suitable for facade, landscape and other places.

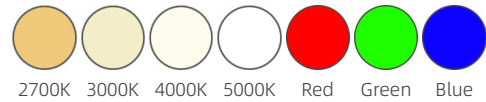

Item No.

Power

Beam Angle

Input Voltage

VIVA-F1

0.32W

120°

DC24V

Colour temperature

IP - IK protection rating

Dimmable

Accessories

2700K
3000K
4000K
5000K
Red
Green
Blue

IP67
IK07

Triac
PWM
0~10V
DALI



Aluminum Recessed Sleeve

Remark:

2*0.5 rubber wire, 1 meter length, includes 4 cm length open wire with wire ferrule