




Spec guide

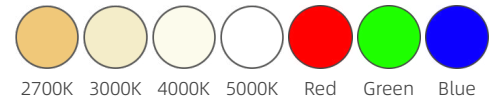

- The light source is Bridgelux/LUMILEDS chip.
- Stainless steel 316L cover & cord grip with passivation process, suitable for projects close to sea.
- The aluminum lamp housing with CNC process and AkzoNobel coating of double-layer spraying, suitable for projects close to sea.
- The illumination is uniform.
- Suitable for facade, landscape and other places.

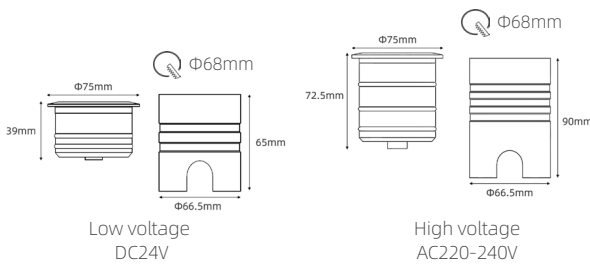

Item No.	Power	Beam Angle	Input Voltage
VIVA-F3	0.9W 1.6W	120°	DC24V AC220-240V

Colour temperature	IP - IK protection rating	Dimmable	Accessories
2700K 3000K 4000K 5000K Red Green Blue	IP67 IK10	Triac PWM 0~10V DALI	 Aluminum Recessed Sleeve

Remark:
2*0.5 rubber wire, 1 meter length, includes 4 cm length open wire with wire ferrule